

1968-1969 Bus Export Model Complete Wiring Harness

This wiring harness kit fits 1968-1969 export Bus models. If your Bus is a European model, or some electrical upgrades have been performed (such as an alternator, or additional equipment), some modifications will be required. The early 1968 used a different turn signal flasher and emergency flasher switch. This wiring kit fits the early 1968 using the modifications we show within the following instructions. This wiring kit does not include the front to rear wire for the rear window defrost circuit.


Basic automotive electronic knowledge is essential for proper installation of this wiring harness. Thoroughly read these installation instructions and study the diagrams to familiarize yourself with the basic layout of your vehicle's electrical system.

Document the routing of the old wiring harness prior to removal. A digital camera is a useful tool for this step.


Component List

- Main Harness (1)
- Dome Light Harness (1)
- Headlight Harness (1)
- Brake Light Harness (1)
- Miscellaneous Wires/Sub Harnesses (31)
- Grommets (4)
- Headlight Plugs (2)
- Male push-on connectors (5)
- 1 to 1 push-on connectors (3)
- "Y" push-on connectors (2)

Installation of male push-on connector sleeve.

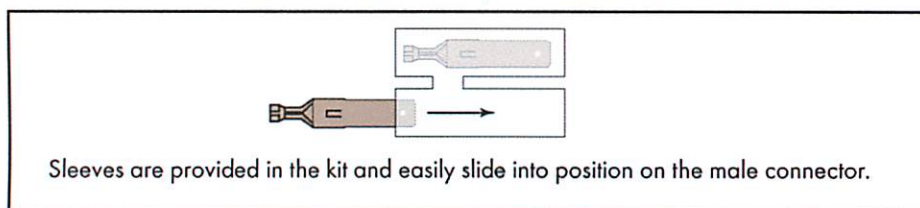

Within the following pages we use the diagram below with a red marking to indicate the exact position of the wire connection on the fuse box. In this example the wire would be running to #1 fuse (fused side). The fuse box is located to the left of the steering wheel directly under the dash.

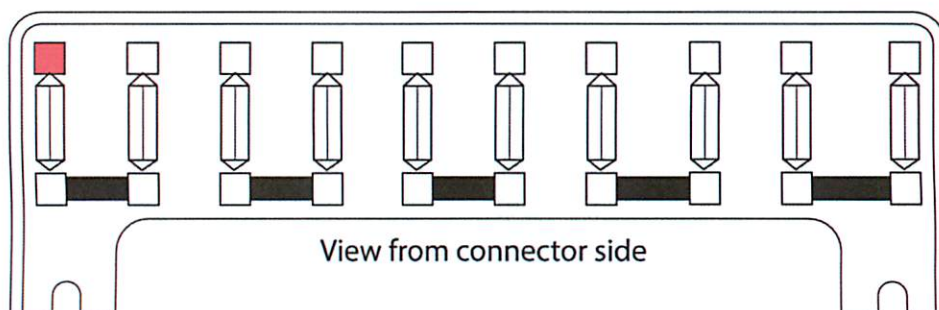

Installation

1. Disconnect negative cable from battery. Review the instructions, and identify the various sub-harnesses and supplemental wires.

2. Now the fun begins!

Access to the wires behind the dash panel will be greatly improved by removing the speedometer dash panel. Unfortunately the heat and fresh air vent knobs situated on the right side of the panel are difficult to remove. You will find that they are held in with a plastic pin that is accessed from the radio opening. With the removal of the knobs you can unscrew the four Philips screws in the corners, unscrew the speedo cable and release the remaining wires from fuel gauge and indicator lights. You now have clear and easy access to the dash wiring. Take a few pictures to document your current layout and then disconnect everything less the wiper motor wiring. With all the wires disconnected behind the dash push the main harness through the hole in floor. In the engine compartment disconnect the wires from the voltage regulator, engine and taillights. Attach a dragline onto the rear portion of the wiring harness (fish tape or heavy cord material) that is a minimum of 15 ft long. Overlap the dragline and main harness for about one foot and use duct tape or plastic tape to attach the dragline securely to the main harness. Wrap the tape tightly as to create a strong, streamlined bundle. The main harness travels along the right side frame member. Release the sheet metal tabs holding the harness to the member. With the dragline securely attached to the old main harness, pull the harness from the front as an assistant helps guide the dragline from the rear.

With the old harness removed attach the rear of the new main harness onto the dragline making sure that the wires are secured properly. Coat the new harness liberally with wire lube (surgical lube works well, KY Jelly, Astroglide, etc.) and pull the new harness into place from the rear while an assistant helps

guide the harness from the front. Be sure to keep lubricating the new harness as it is being fed while keeping the harness bundle as straight as possible. If the harness becomes stuck, do not force the issue. Reverse the procedure and observe the path of travel and remedy any obstacle. With the harness pulled into position fasten it the side member with the existing tabs. Feed the front end of the harness through the underside of the floor. Note that a grommet was not used here originally but instead a putty type sealer was applied.

See diagram on page (4) for proper connections on the main harness.

3. Install the dome light harness, see diagram on page (9). If your Bus currently has a headliner installed this will be difficult. If your old harness is still intact, it's best to use the harness already present in lieu of replacement.

4. Install new headlight harness, see diagram on page (5) using the supplied grommets for the headlight buckets. Use the supplied headlight plugs and refer to the diagram on page (5) to correctly locate the wires into the plug. When plugging in the turn signal/ park light wires make sure that you connect the black wire to the brighter side of the bulb (see note in lower portion of page (4) for more info).

It's best if you have the dash switches removed from the dash with the terminal identification in clear view when installing the balance of dash wiring.


5. Install the brake light/horn harness, see page (9).

6. Install miscellaneous supplemental wires, see page (6 - 9) for illustrations.


7. In the engine compartment install the tail light wiring making sure again to attach the black with stripe wire to the bright side of the bulb. Use the supplied grommet (center portion has a closed membrane, use knife to open small slice in center) to route the backup harness from the backup switch through the left side of the firewall.

This completes the installation. Review your work to insure that you have not crossed any wires. Reconnect the battery cables and check all the electrical components for proper operation.


Main Harness



















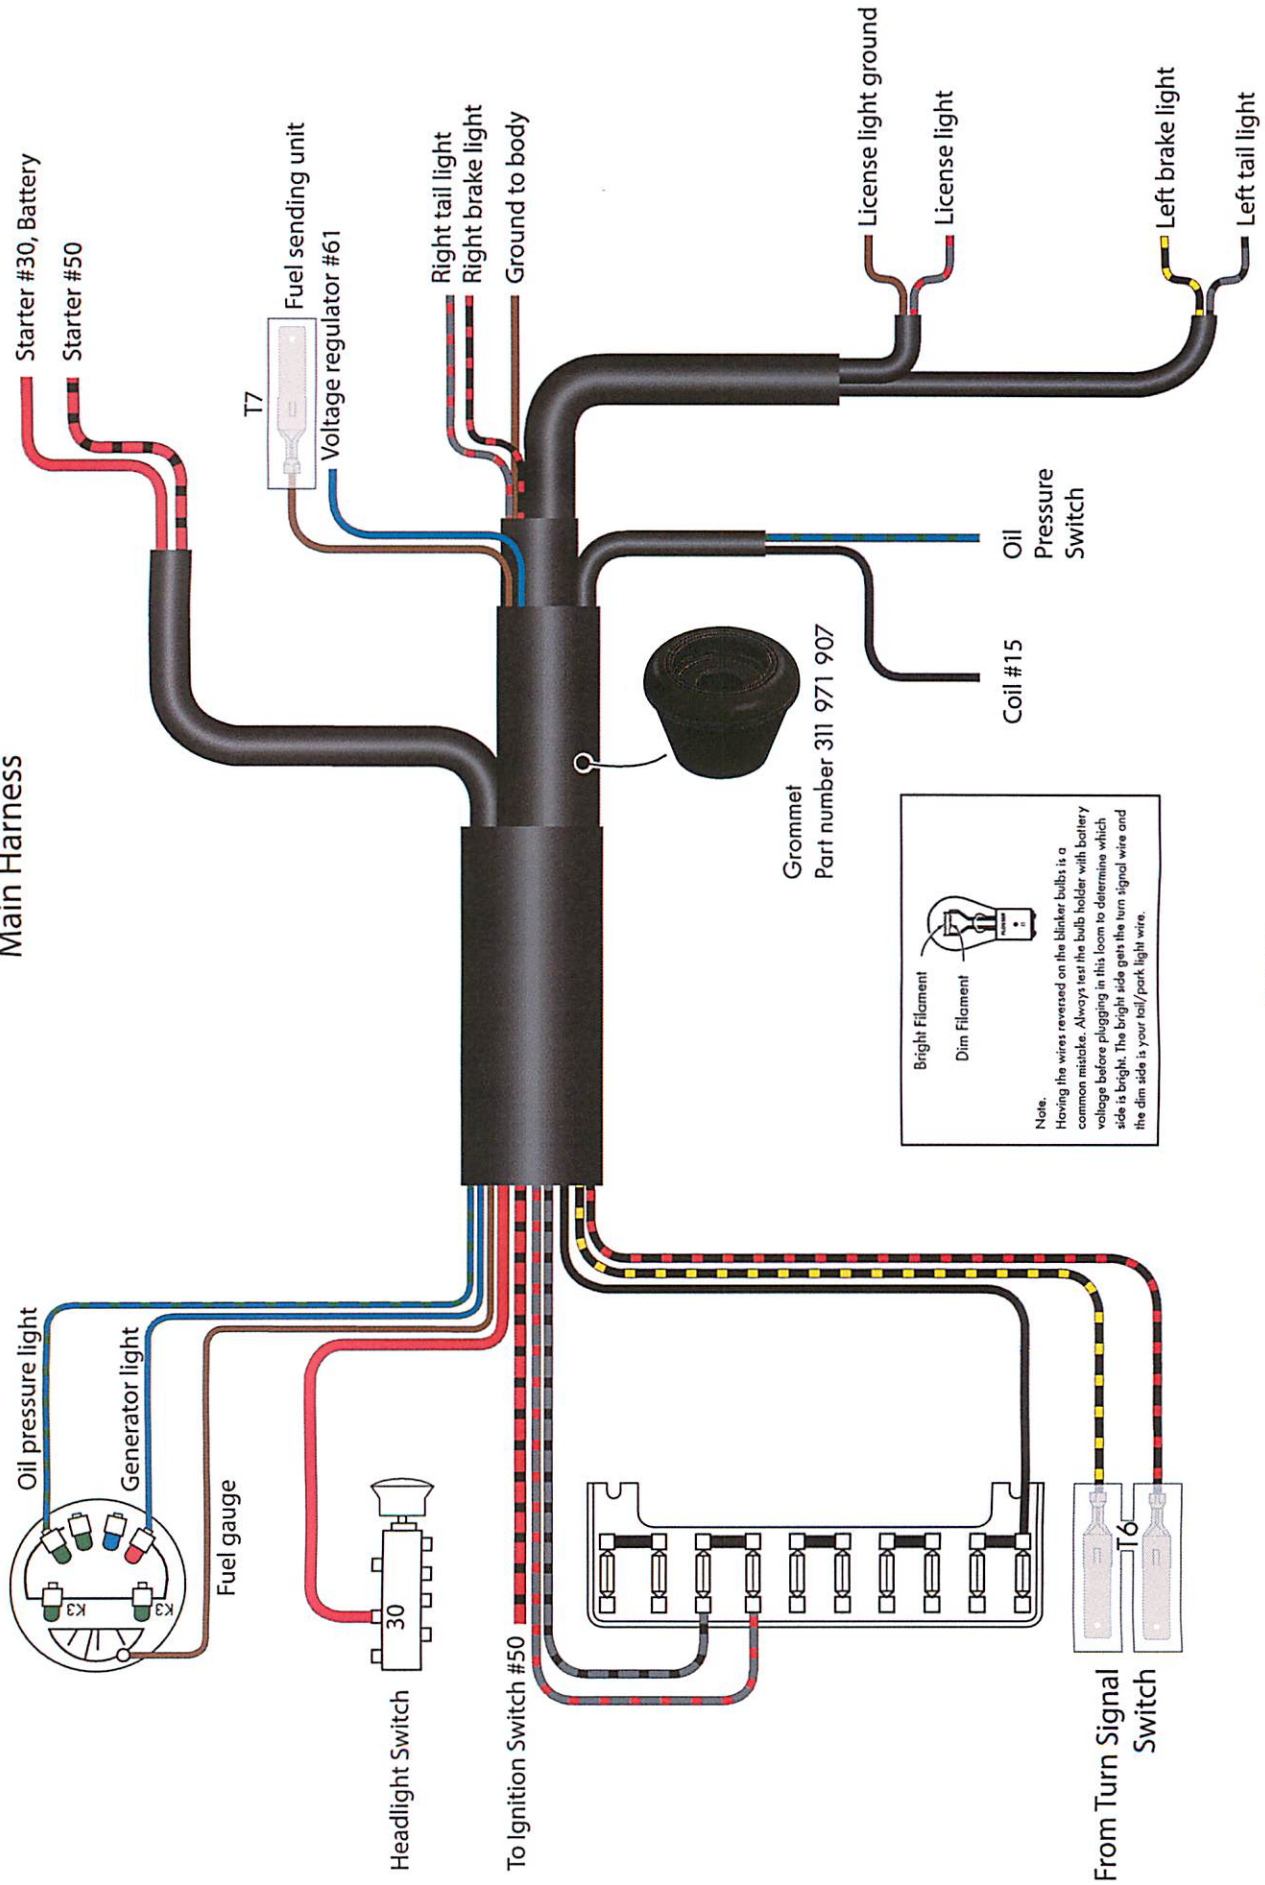







© Wolfsburg West 2015


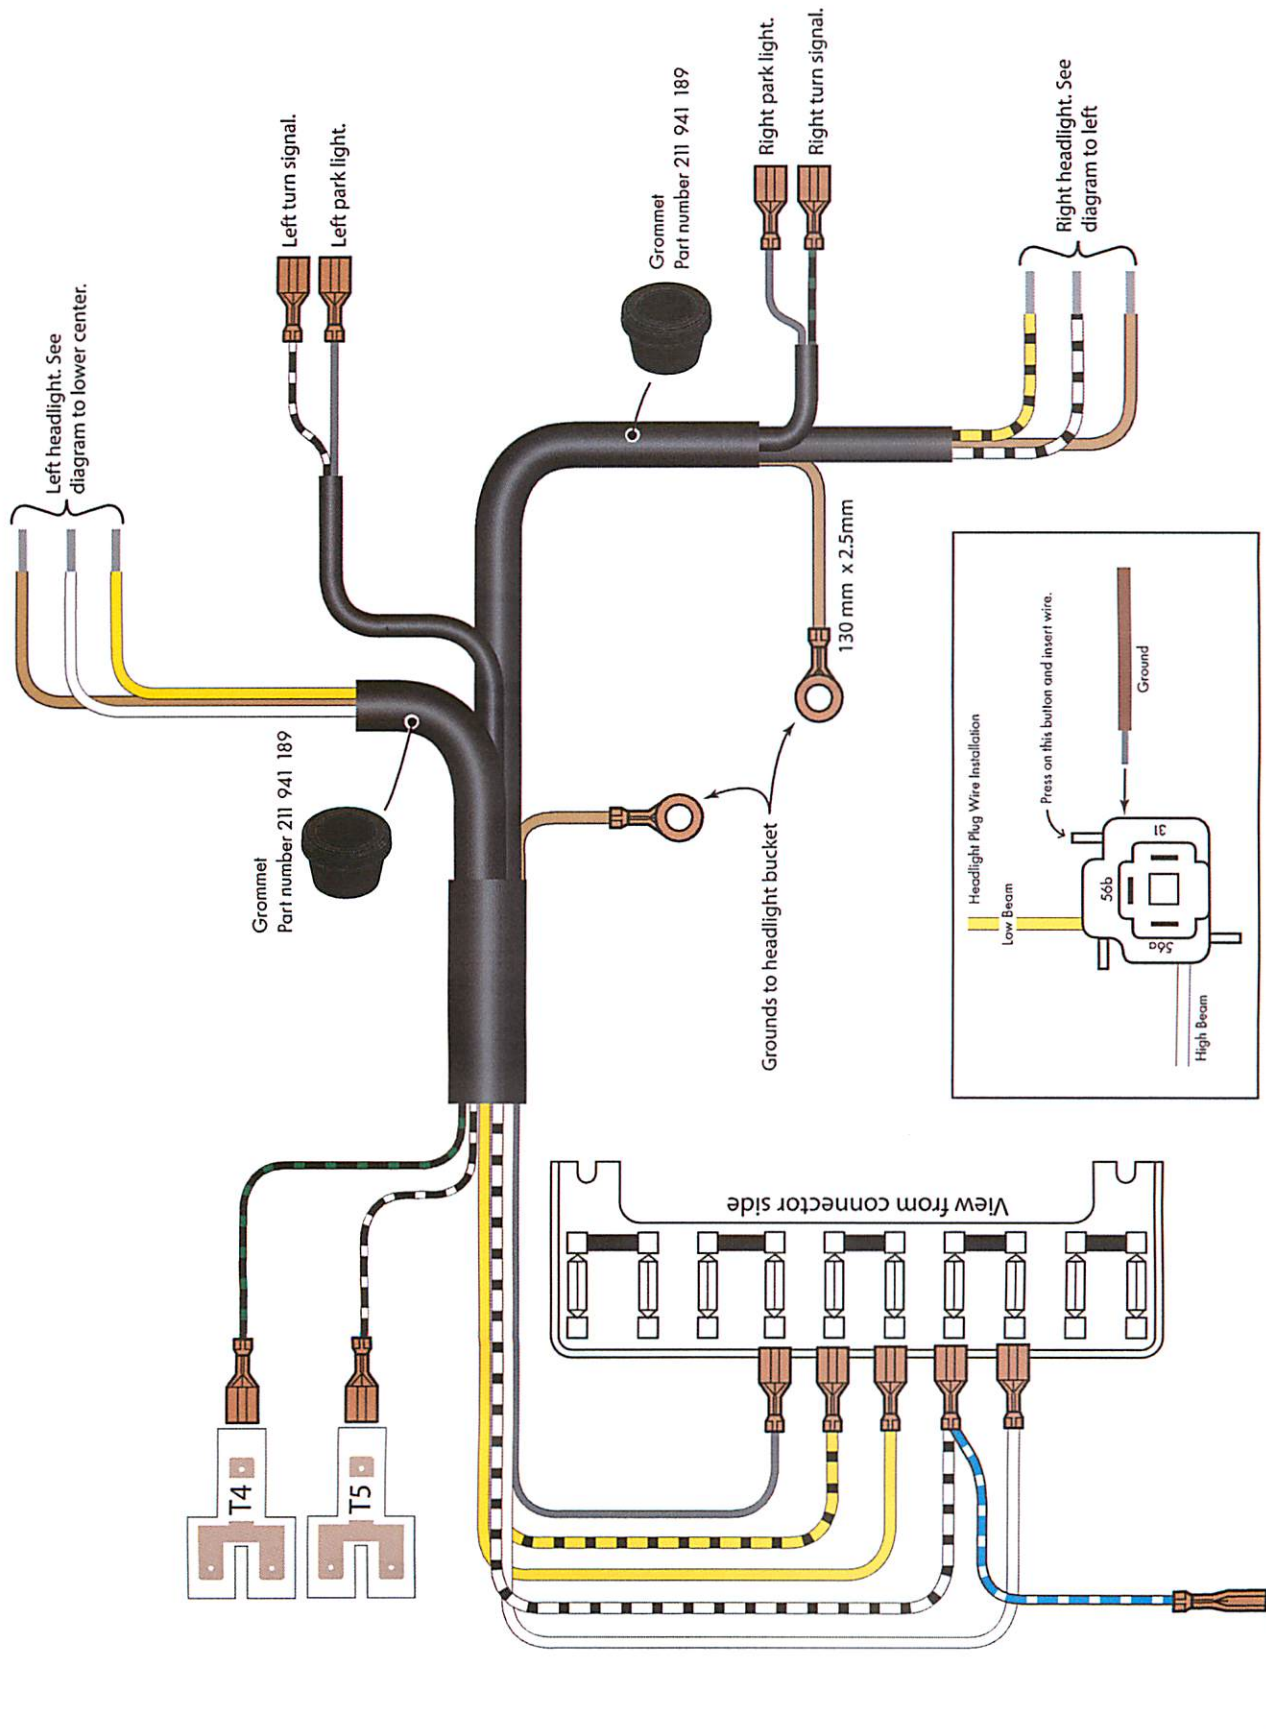


© Wolfsburg West 2015

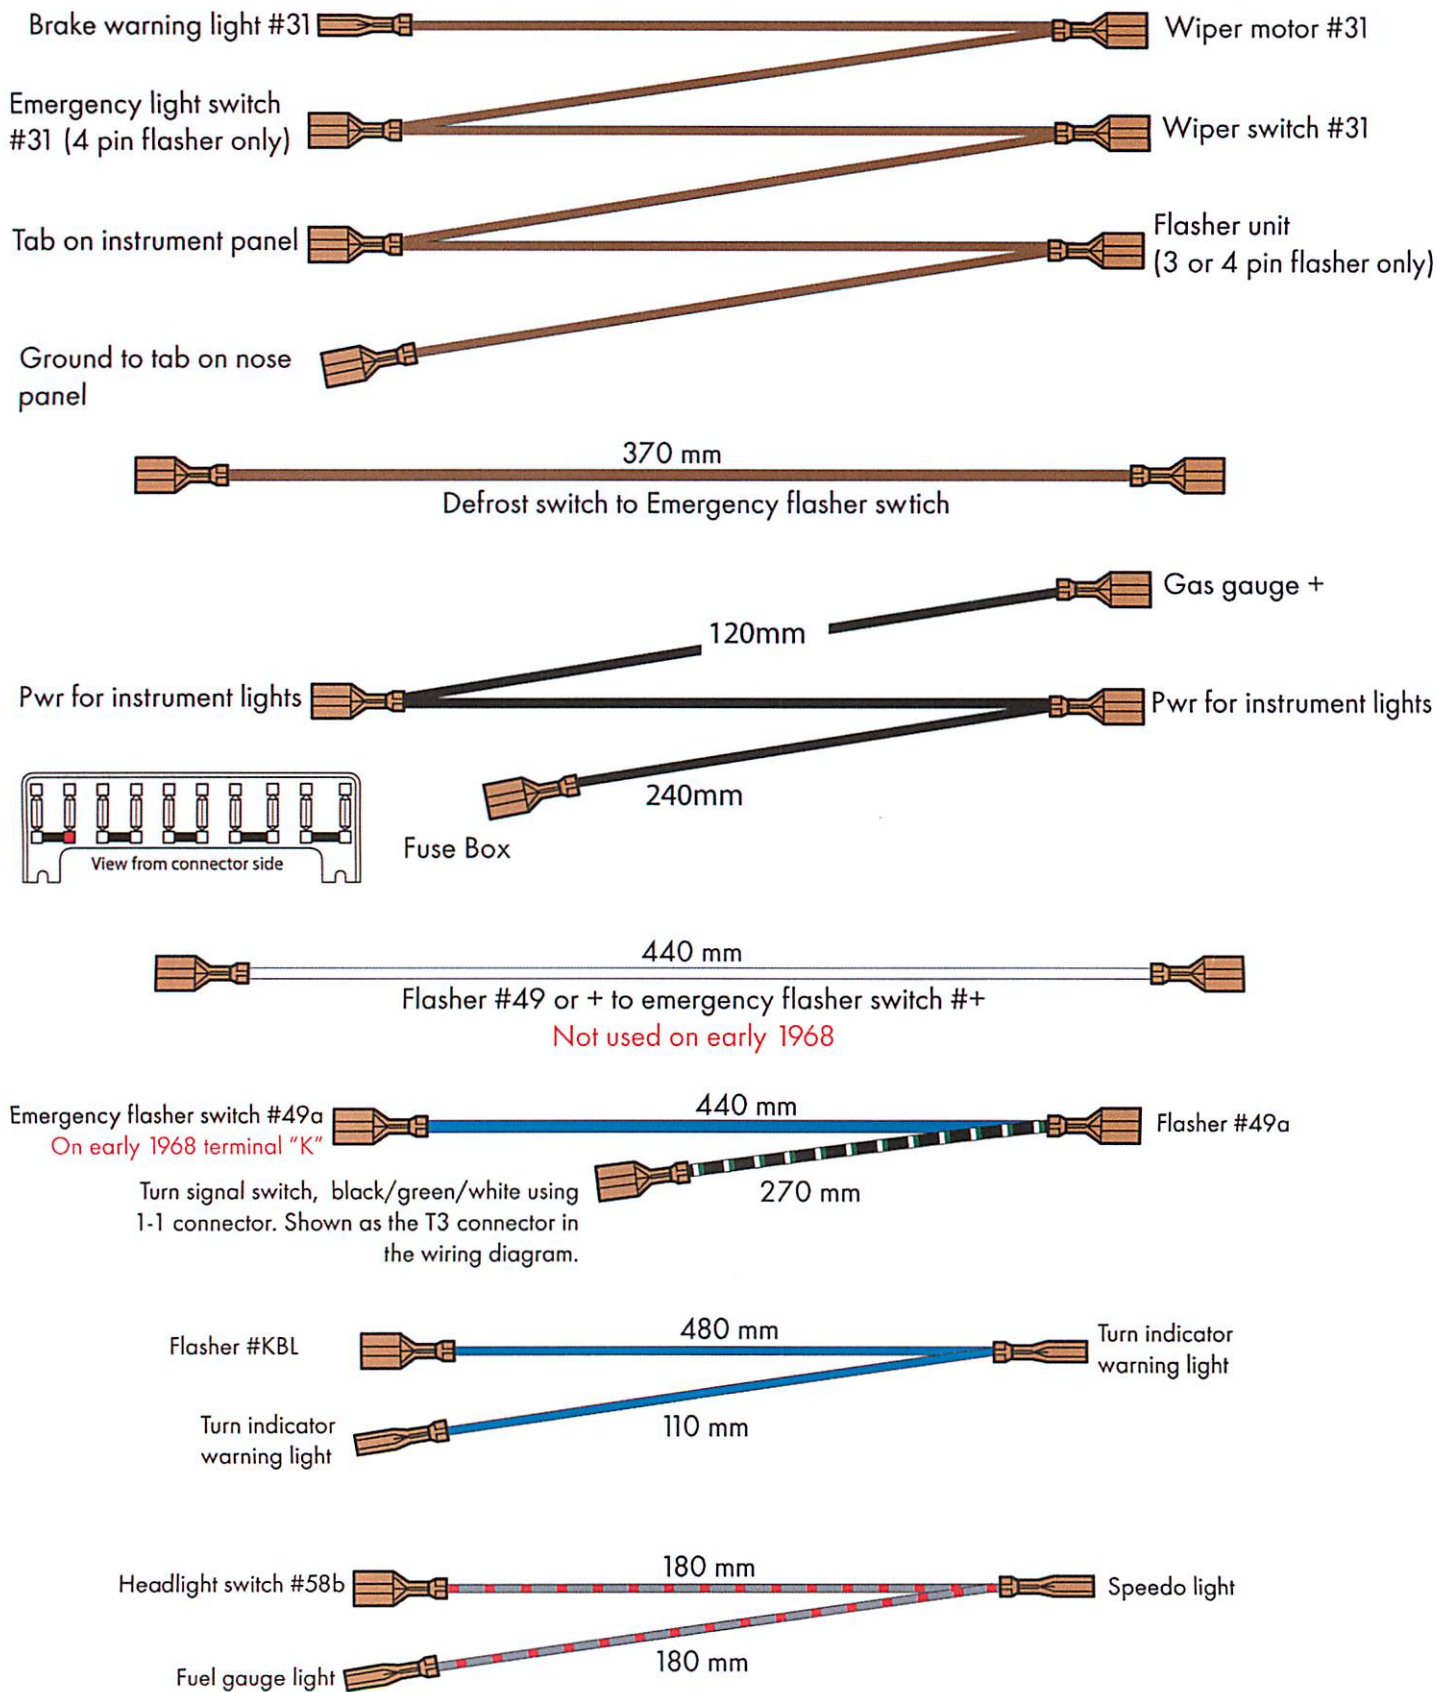


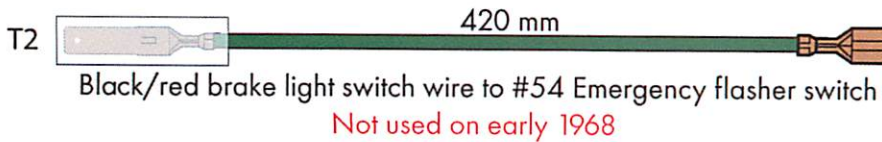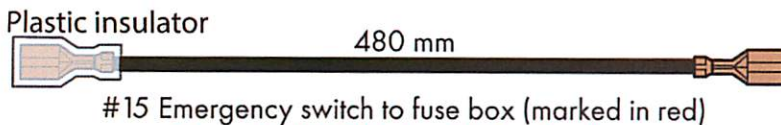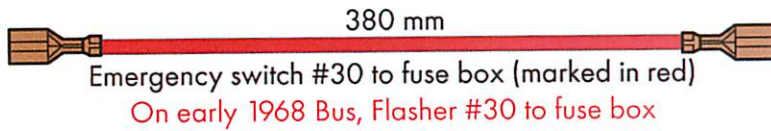

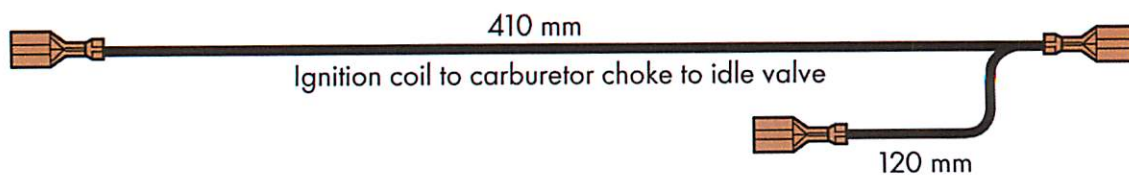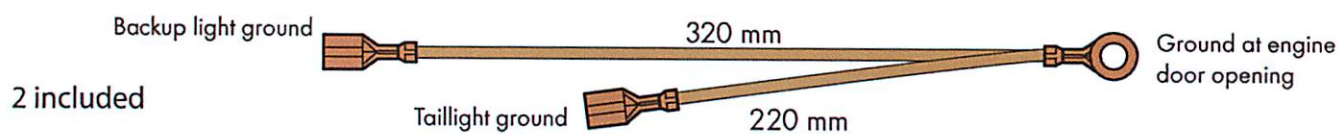


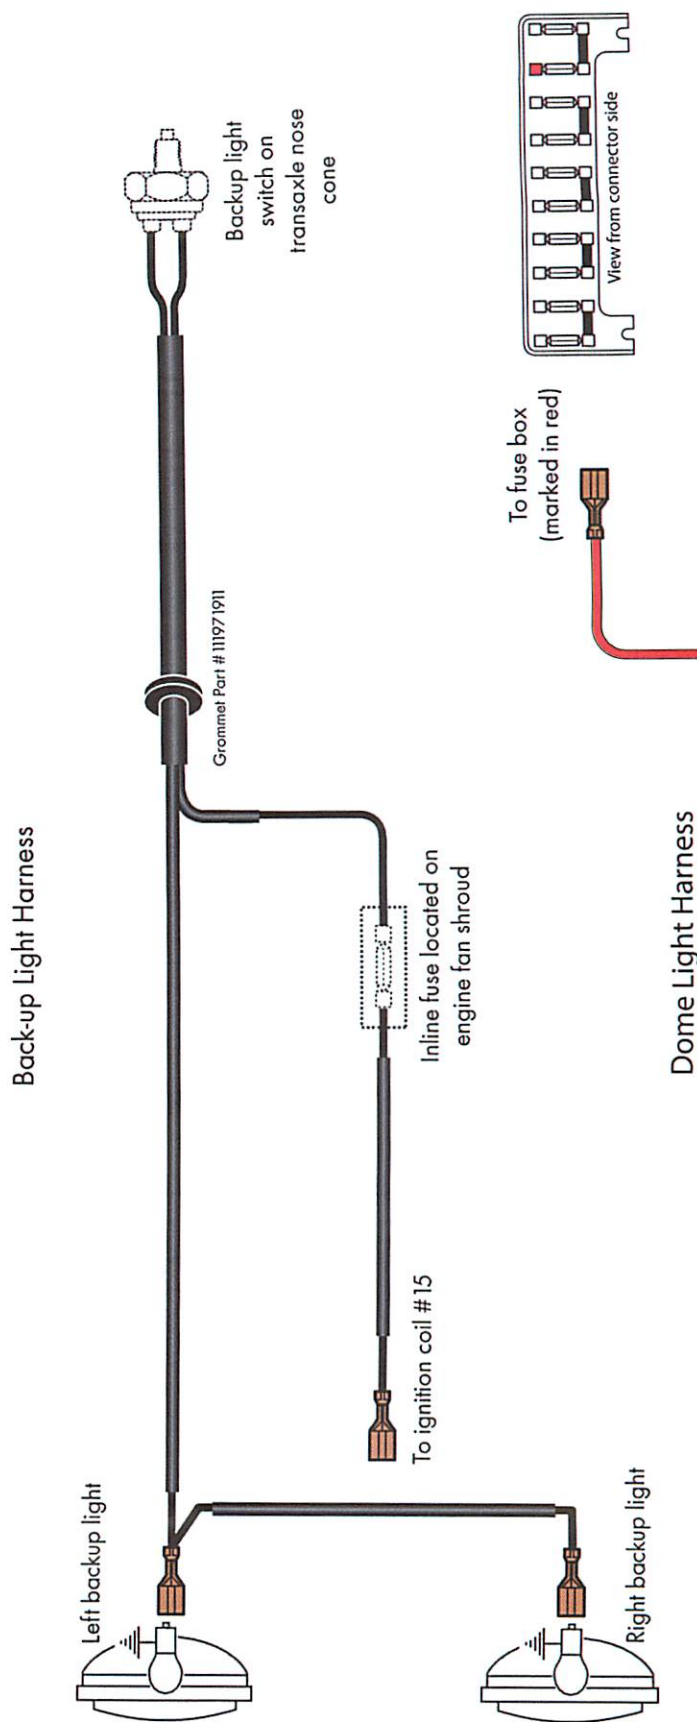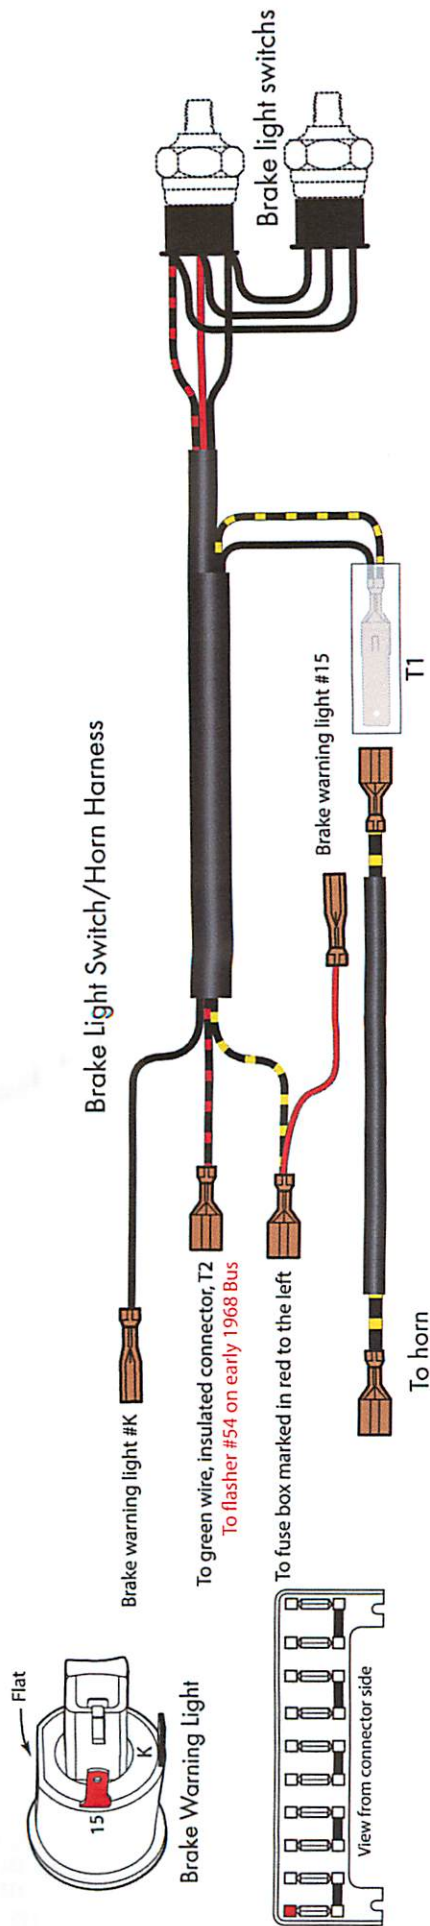

Note: Make sure you connect these wires to the non-switched side of the dome light!

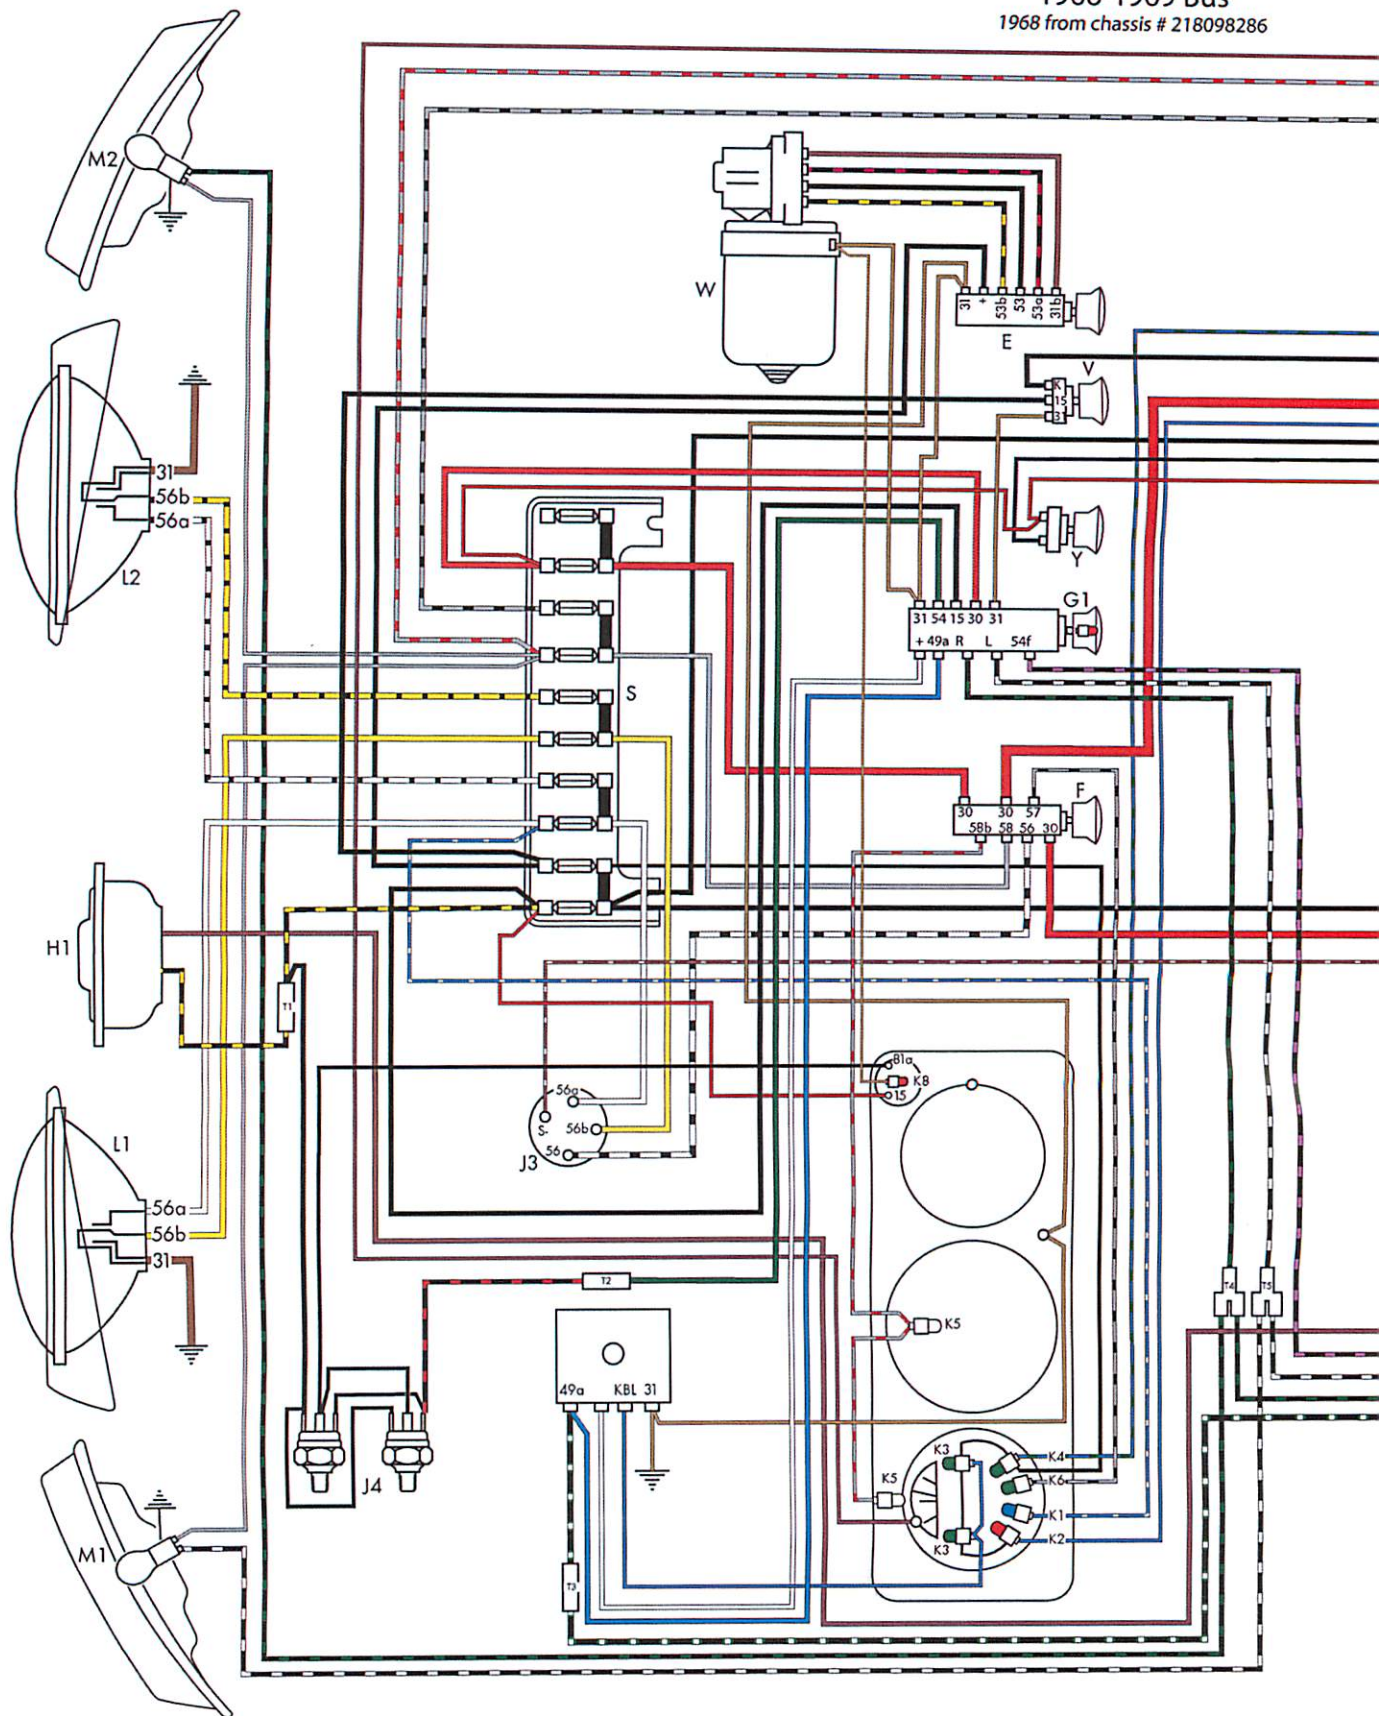

A	Battery	G1	Emergency flasher switch	J6	Back-up light switch	K8
B	Starter	H1	Horn	J7	Fuel gauge sending unit	L1
C	Generator	H2	Horn button	K1	High beam warning light	L2
C1	Voltage regulator	J	Turn Signal/Emergency relay	K2	Generator warning light	M1
D	Starter/Ignition switch	J2	Dimmer switch	K3	Turn indicator warning light	M2
E	Windshield wiper switch	J3	Dimmer relay	K4	Oil pressure warning light	O
F	Light switch	J4	Stop light switch	K5	Instrument lights	O1
G	Turn indicator switch	J5	Oil pressure switch	K6	Parking indicator light	O2

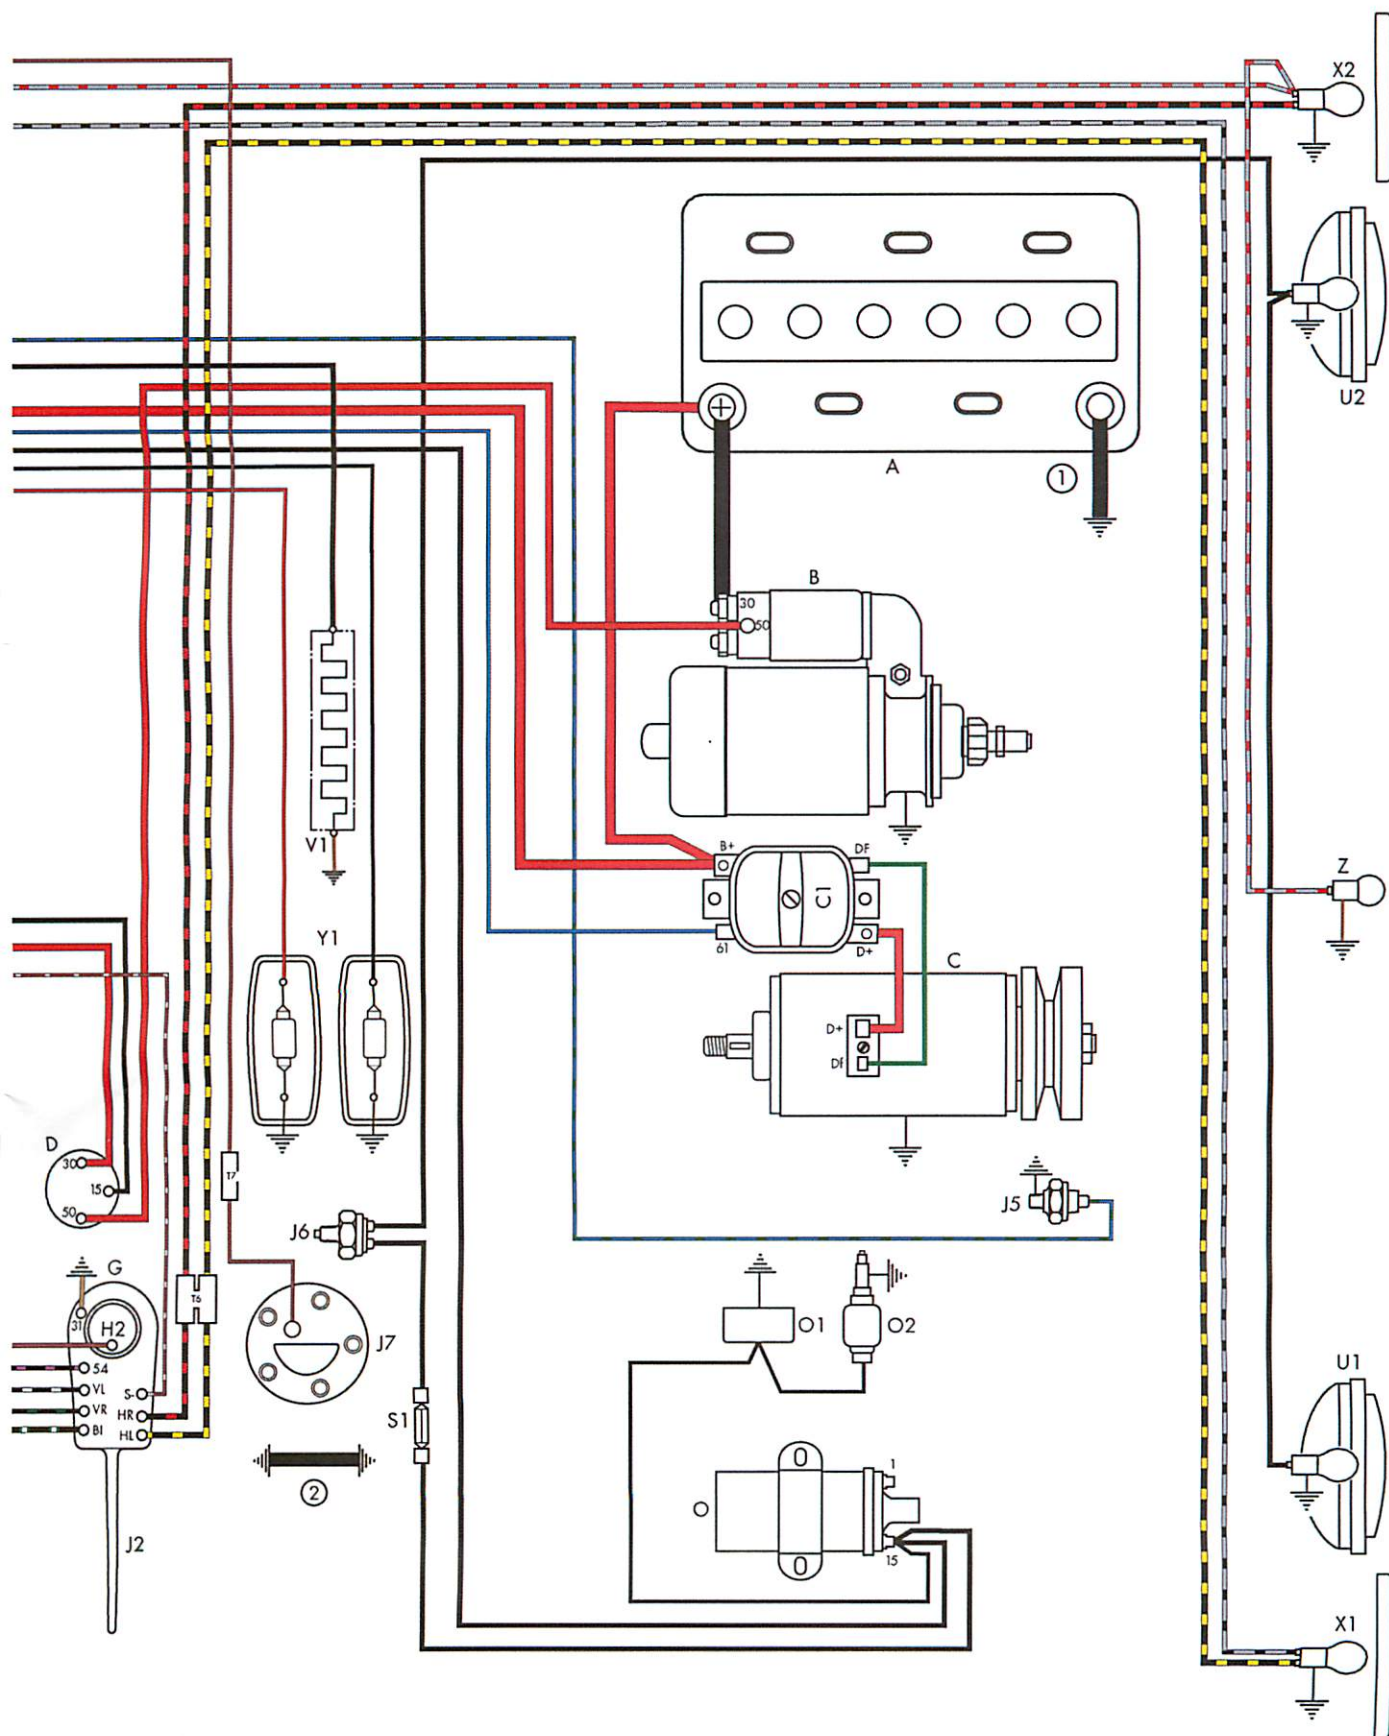

Brake warning light
Sealed-beam unit, left
Sealed-beam unit, right
Parking light/Turn light, left
Parking light/Turn light, right
Coil
Automatic choke
Electric idle jet

S Fuse box, 10 fuse
S1 Back-up light fuse in engine compartment
U1 Back-up light, left
U2 Back-up light, right
V Rear window defrost switch
V1 Rear window defrost
W Windshield wiper motor
X1 Stop/tail/turn light, rear left

X2 Stop/tail/turn light, rear right
Y Rear interior light switch
Y1 Interior light
Z License plate light
① Battery ground strap
② Chassis to transaxle ground strap

Use the diagram below for early 1968 buses with a 9 pin flasher box when fitting this wiring kit.

